

CANTERBURY™ WHIRLPOOL

❑ 015-0026 Canterbury Whirlpool

- Rectangular unit with spacious bathing well
- Eight fully adjustable hydro-jets
- Air on/off switch
- Electronic control pad enables use of Whirlpool, Air Massage, or both systems simultaneously (Total Massage models only)
- Safety suction system
- Pre-leveled base
- Textured bottom for slip-resistance
- Apron available (optional)
- Factory installed options available
- Limited Lifetime Warranty including parts, five year warranty on labor



Nominal Dimensions:

60" x 36" x 19-1/2"
(1524 x 914 x 495mm)

❑ 015-0021 Canterbury Air Massage Tub

- High gloss acrylic
- Bath with Air Massage system

❑ 015-0027 Canterbury Total Massage Whirlpool

- Same as 015-0026 except with Air Massage system and electronic control pad and includes factory installed whirlpool heater

❑ 015-0020 Canterbury Bathing Pool

- High gloss acrylic

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs

To Be Specified - Required:

- ❑ Color:
- ❑ Bath Faucet: (specify finish)
Recommended: 9088900.295
(check deck width prior to mounting on unit)
- ❑ Bath Drain:

To Be Specified - Optional:


- ❑ 415-0015 - 5' acrylic apron/skirt, color-matched (specify color) 60" x 20" x 1" (1524 x 508 x 25mm)
- ❑ 415-0005 - 5' Co-Ex apron/skirt, color-matched with access panel (available in white color only) 62" x 23" x 3" (1575 x 584 x 76mm)
- ❑ 415-0055 - 5' acrylic apron/skirt, color-matched with access panel (specify color) 60" x 20" x 1" (1524 x 508 x 25mm)
- ❑ 494-0060 - Attachable tile flange
- ❑ 494-1000 - In-line heater (field installed)

Factory Installed - Optional:

- ❑ 494-8000-00 - Chrome finish hydro-jets (8)
- ❑ 494-8000-04 - Polished Brass finish hydro-jets (8)
- ❑ 494-8000-25 - Satin Nickel finish hydro-jets (8)
- ❑ 494-8100-00 - Mood light
- ❑ 494-8500-00 - Chromatherapy light kit (2 LED lights)
- ❑ 494-8505-00 - Remote for chromatherapy light kit

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS

For color/finish availability and other faucet choices,
please see www.eljer.com

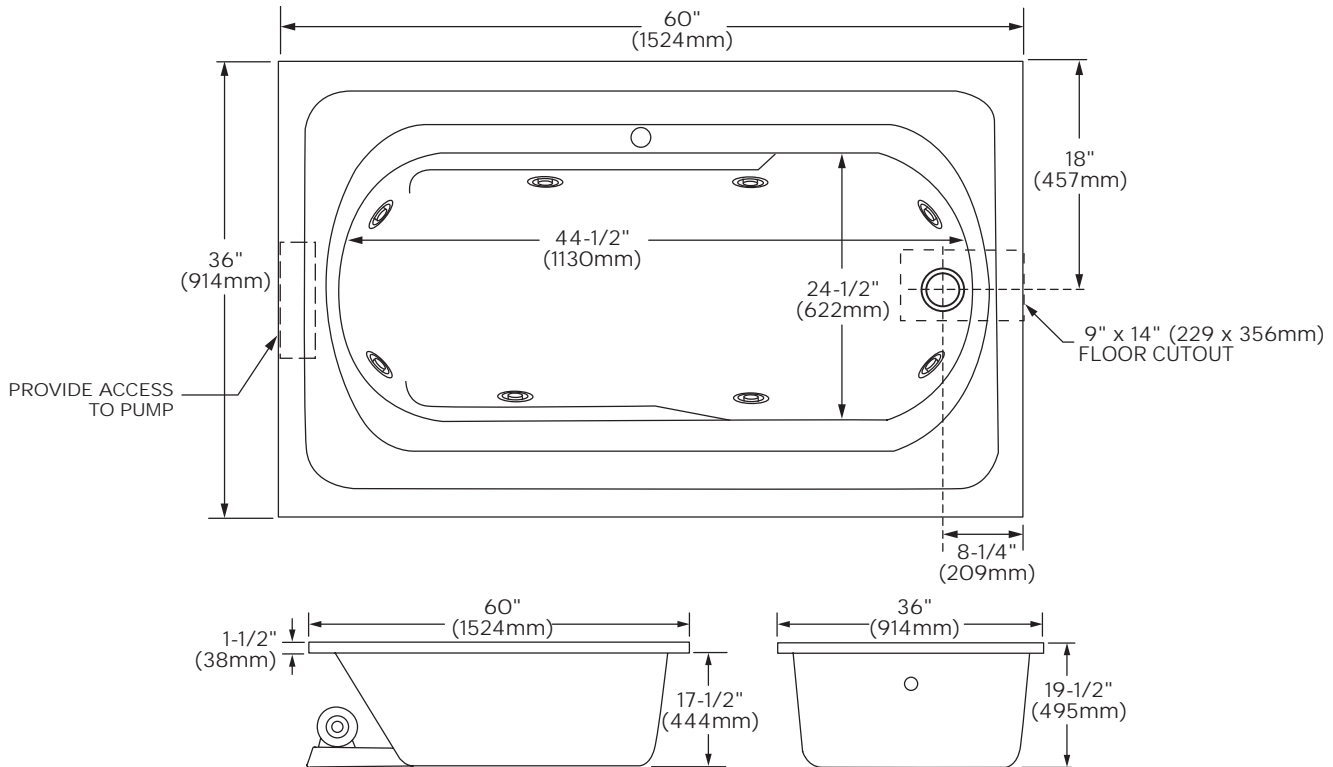

GENERAL SPECIFICATIONS FOR CANTERBURY™ WHIRLPOOL	
INSTALLED SIZE	60 x 36 x 19-1/2 In. (1524 x 914 x 495mm)
WEIGHT	102 Lbs. (46 Kg.)
WEIGHT w/WATER	414 Lbs. (188 Kg.)
GAL. TO OVERFLOW	45 Gal. (170 L.)
BATHING WELL AT SUMP	44-1/2 x 24-1/2 In. (1130 x 622mm)
WATER DEPTH TO OVERFLOW	16-1/4 In. (413mm)
FLOOR LOADING (PROJECTED AREA)	28 Lbs./Sq. Ft. (135 Kgs/Sq. m.)
PTS.	14.5
CUBE (FT ³)	28.8

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD KIT AND APRON AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.